

PLAN VIEW


SPECIFICATIONS

5000PSI WITH SUPER PLASTICIZER


BOTTOM AND SIDES ARE REINFORCED WITH 6X6X10 GAUGE WIRE

TOP IS REINFORCED WITH 1/2" GRADE 60 REBAR ON 16" CENTERS

POLY III PRESSURE RATED RUBBER SEALS AVAILABLE UPON REQUEST

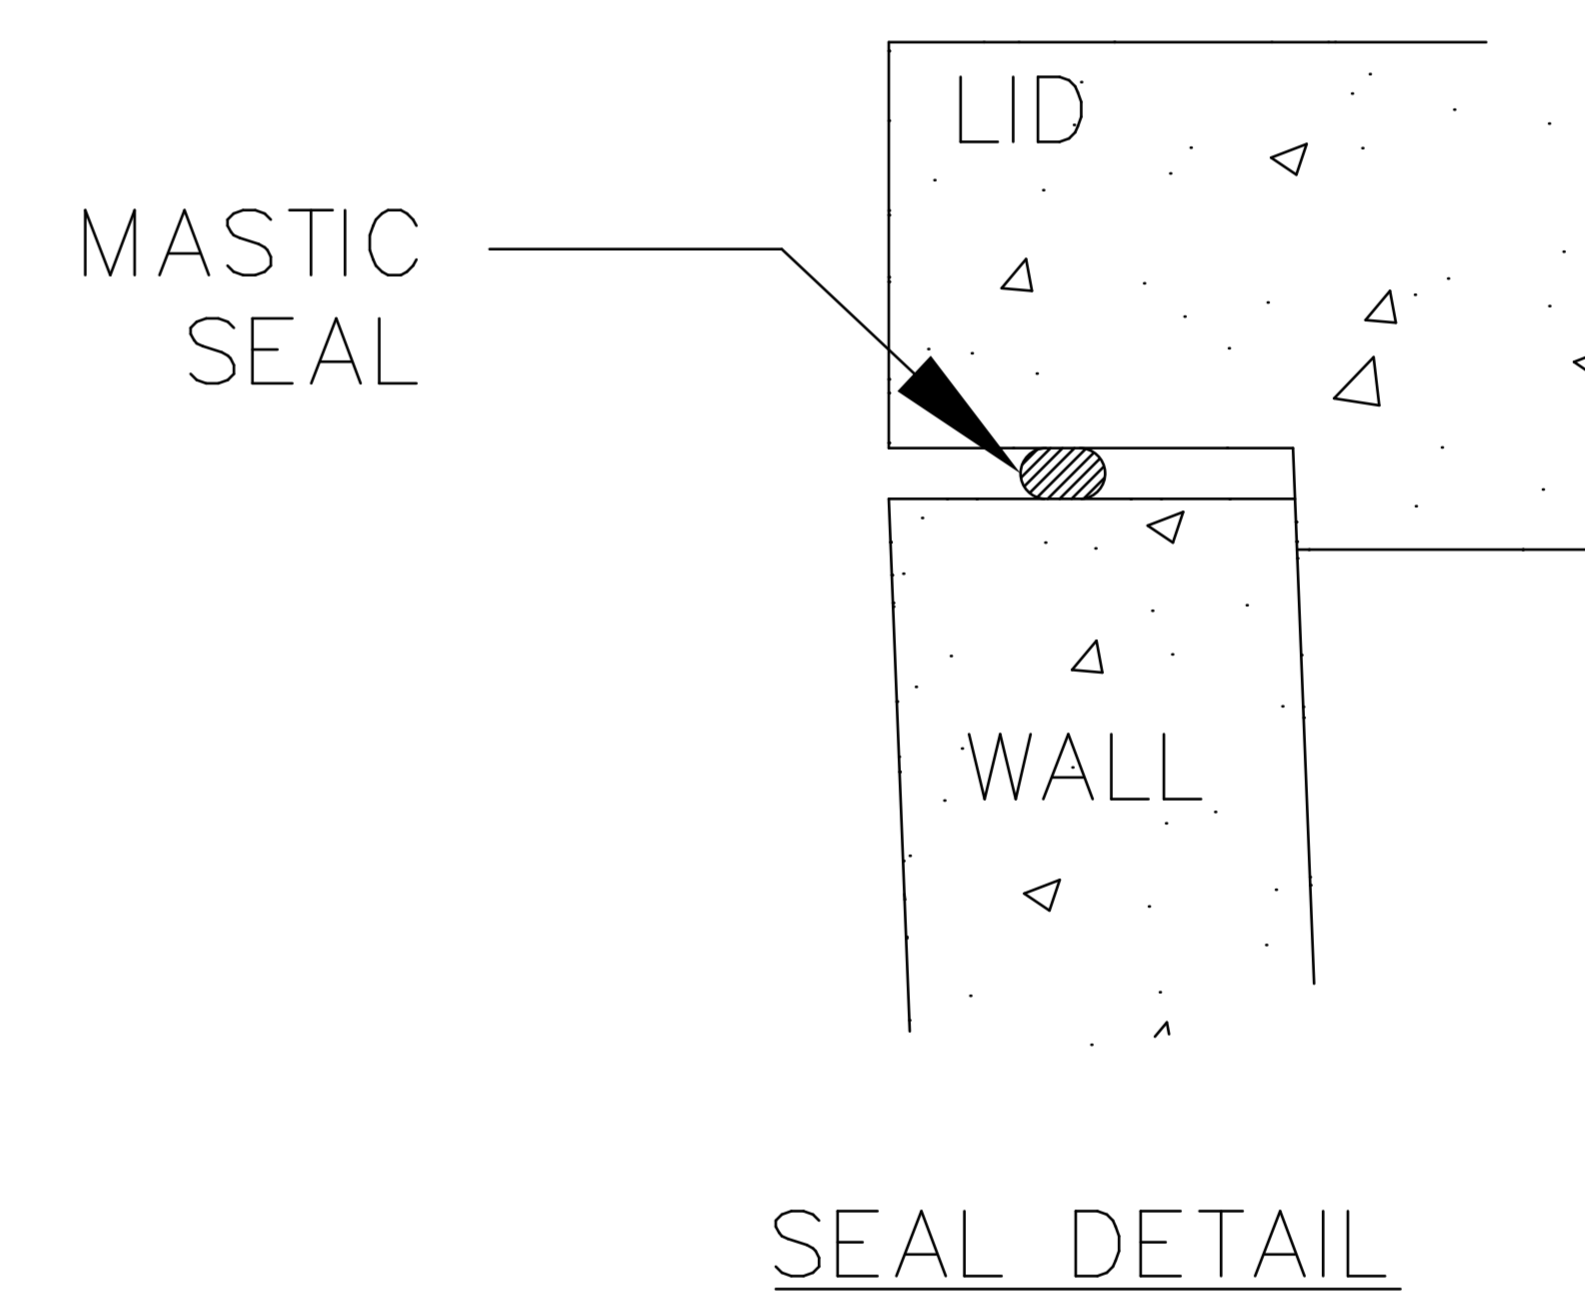

SEAL DETAIL

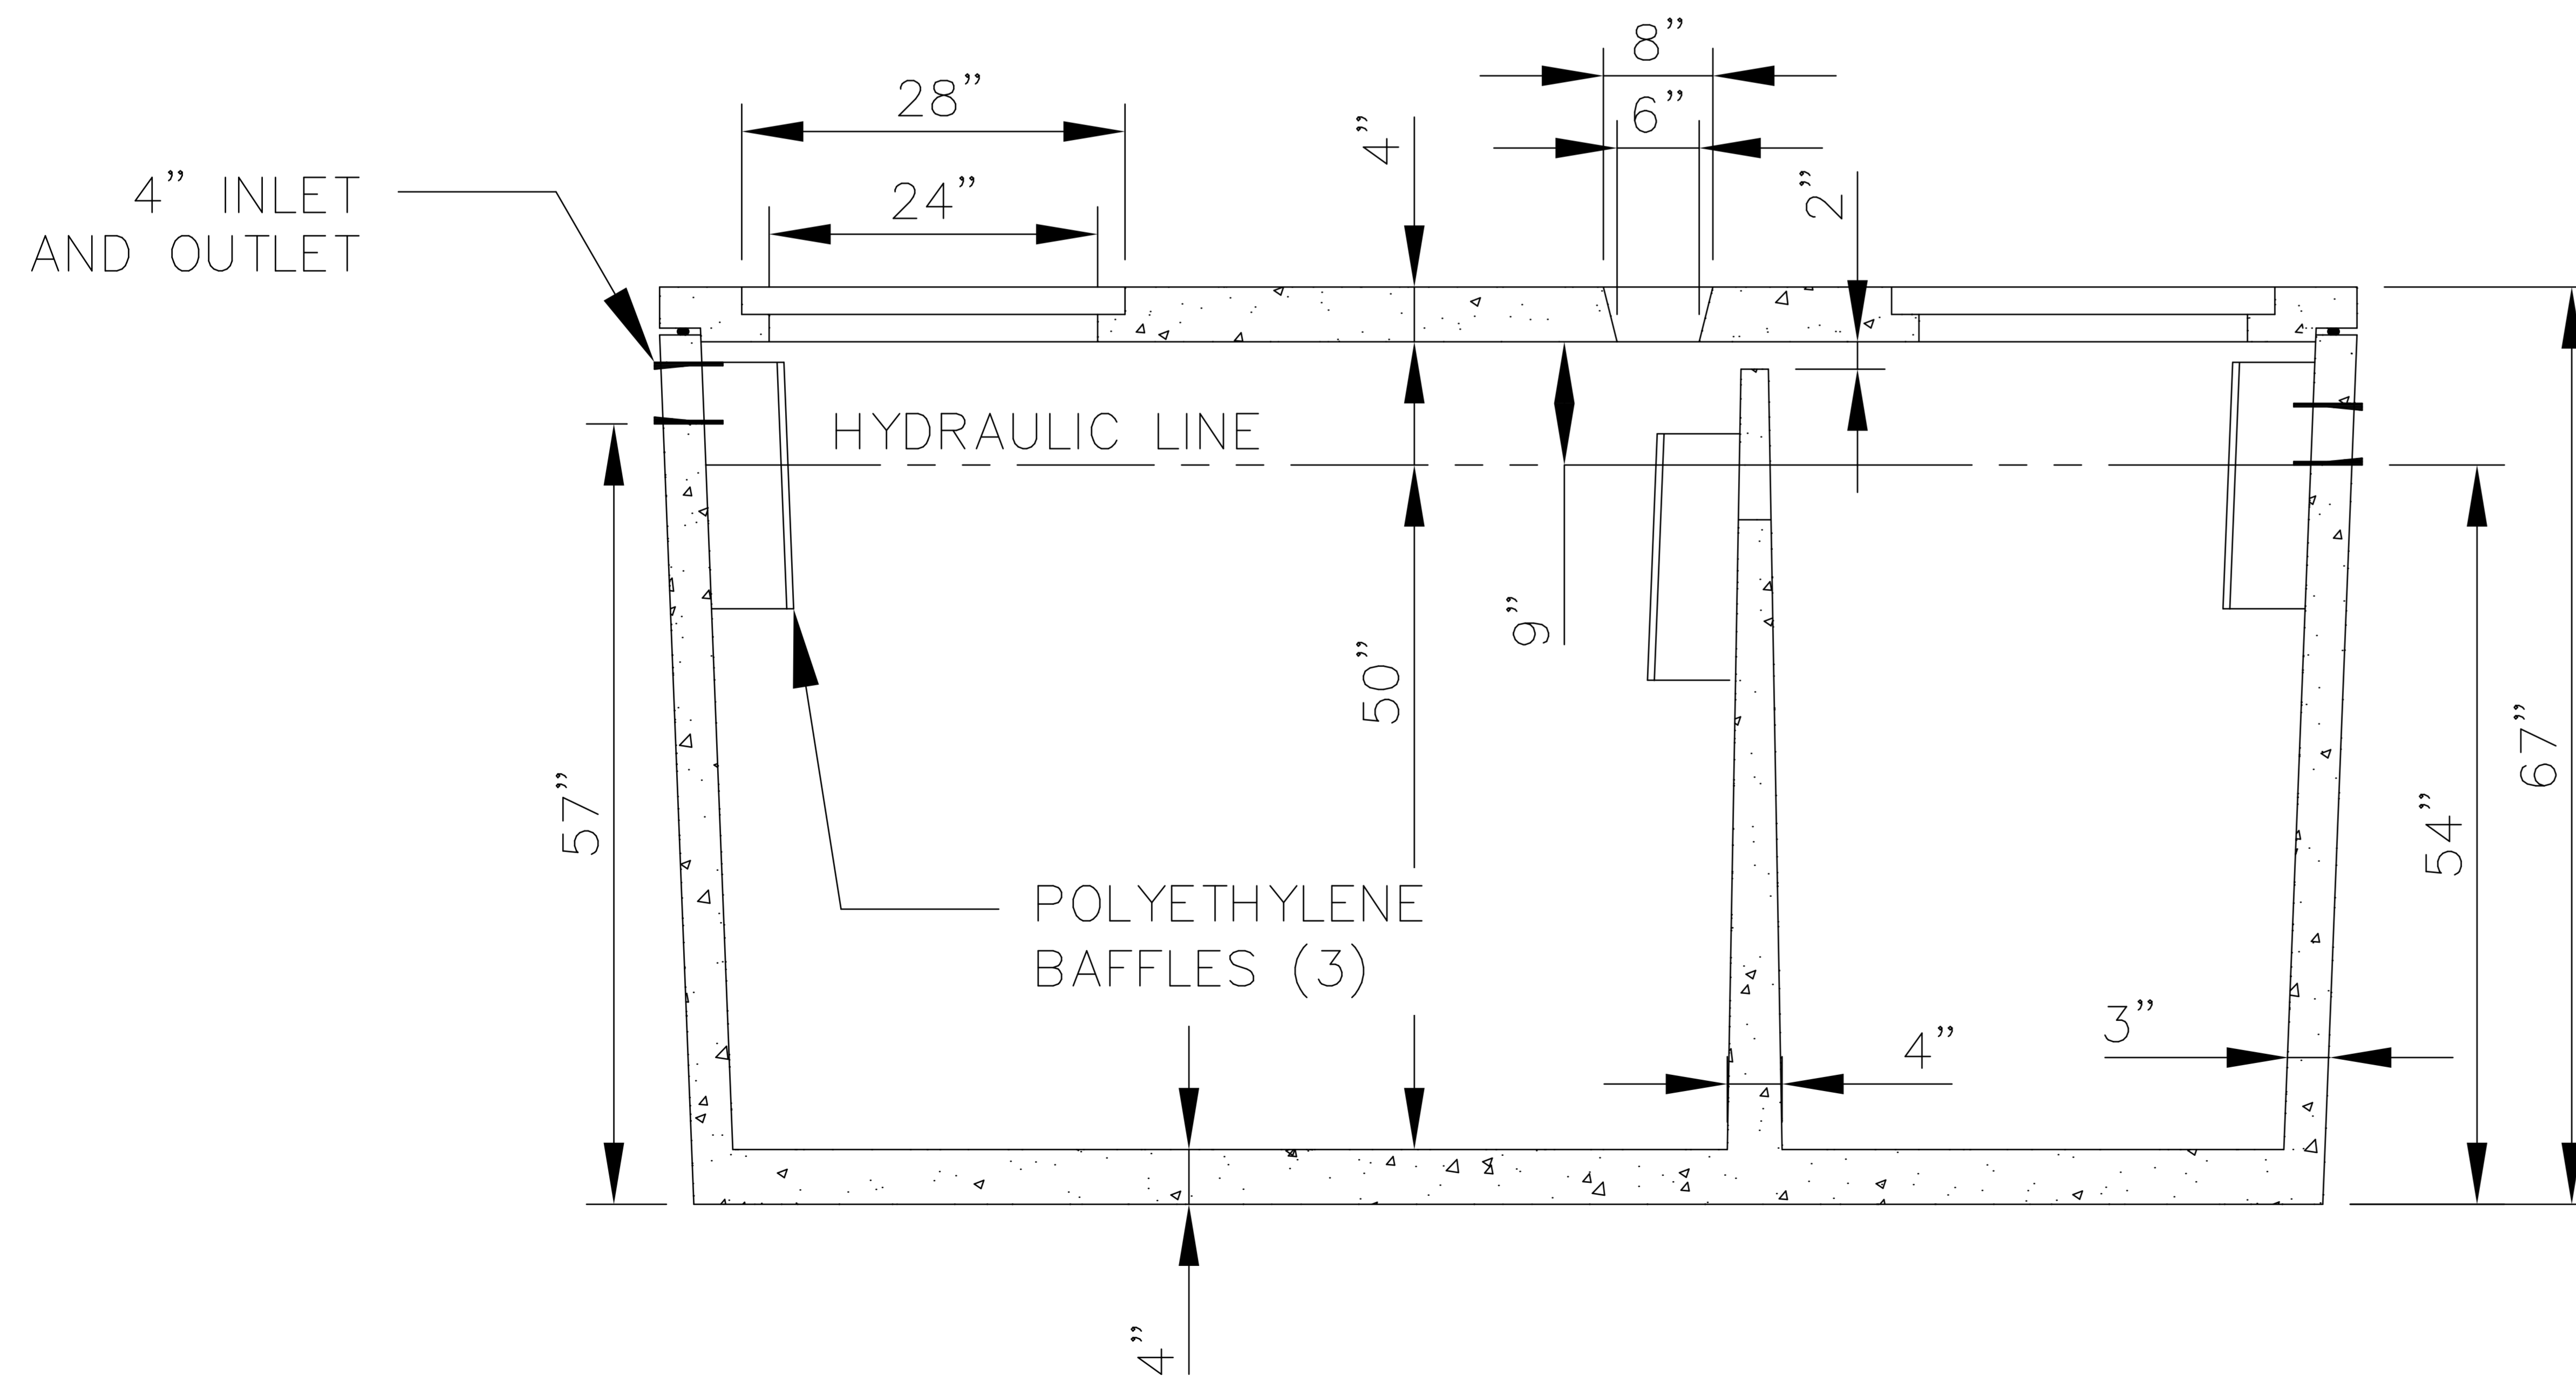

SECTION VIEW

THIS DOCUMENT MAY NOT BE DISTRIBUTED, MODIFIED, ALTERED, OR REPRODUCED IN WHOLE OR IN PART WITHOUT THE PRIOR WRITTEN PERMISSION OF MARYLAND CONCRETE SEPTIC TANK INC.

REVISION SIGNOFF

Number	Date	Initial
1		
2		
3		
4		
5		
6		
7		
8		

**Maryland Concrete Inc.**

1500 GALLON 2 COMPARTMENT SEPTIC TANK

443 491 3598 (o) 410 357 5297 (f)

DRAWN: JMH 6/4/13

CHECKED: TLG 6/4/13

SCALE: 3/8" = 1'

**No. MC015**

DATE	REVISION DESCRIPTION	DESIGNER/CHECKER
3		
2		
1	6/5/13 REVISED WIDTH	JMH / TLG
0	6/4/13 ISSUED FOR CONSTRUCTION	JMH / TLG

DATE REVISION DESCRIPTION DESIGNER/CHECKER